


ANGLE TYPE MUD BOX

KÖŞE TİP ÇAMUR KUTUSU



Pressure Rate / *Basınç Aralığı*: PN 4
 Size Range / *Ölçü Aralığı*: DN40-DN400
 Flange Ends / *Flanş*: DIN EN 1092(PN10Flange)
 Application: For pipelines for sea cooling water
 Dimensions / *Ölçüler*: DIN 87 151-E Angle
 DIN 87 151-D Straight
 Test: DIN EN 12266

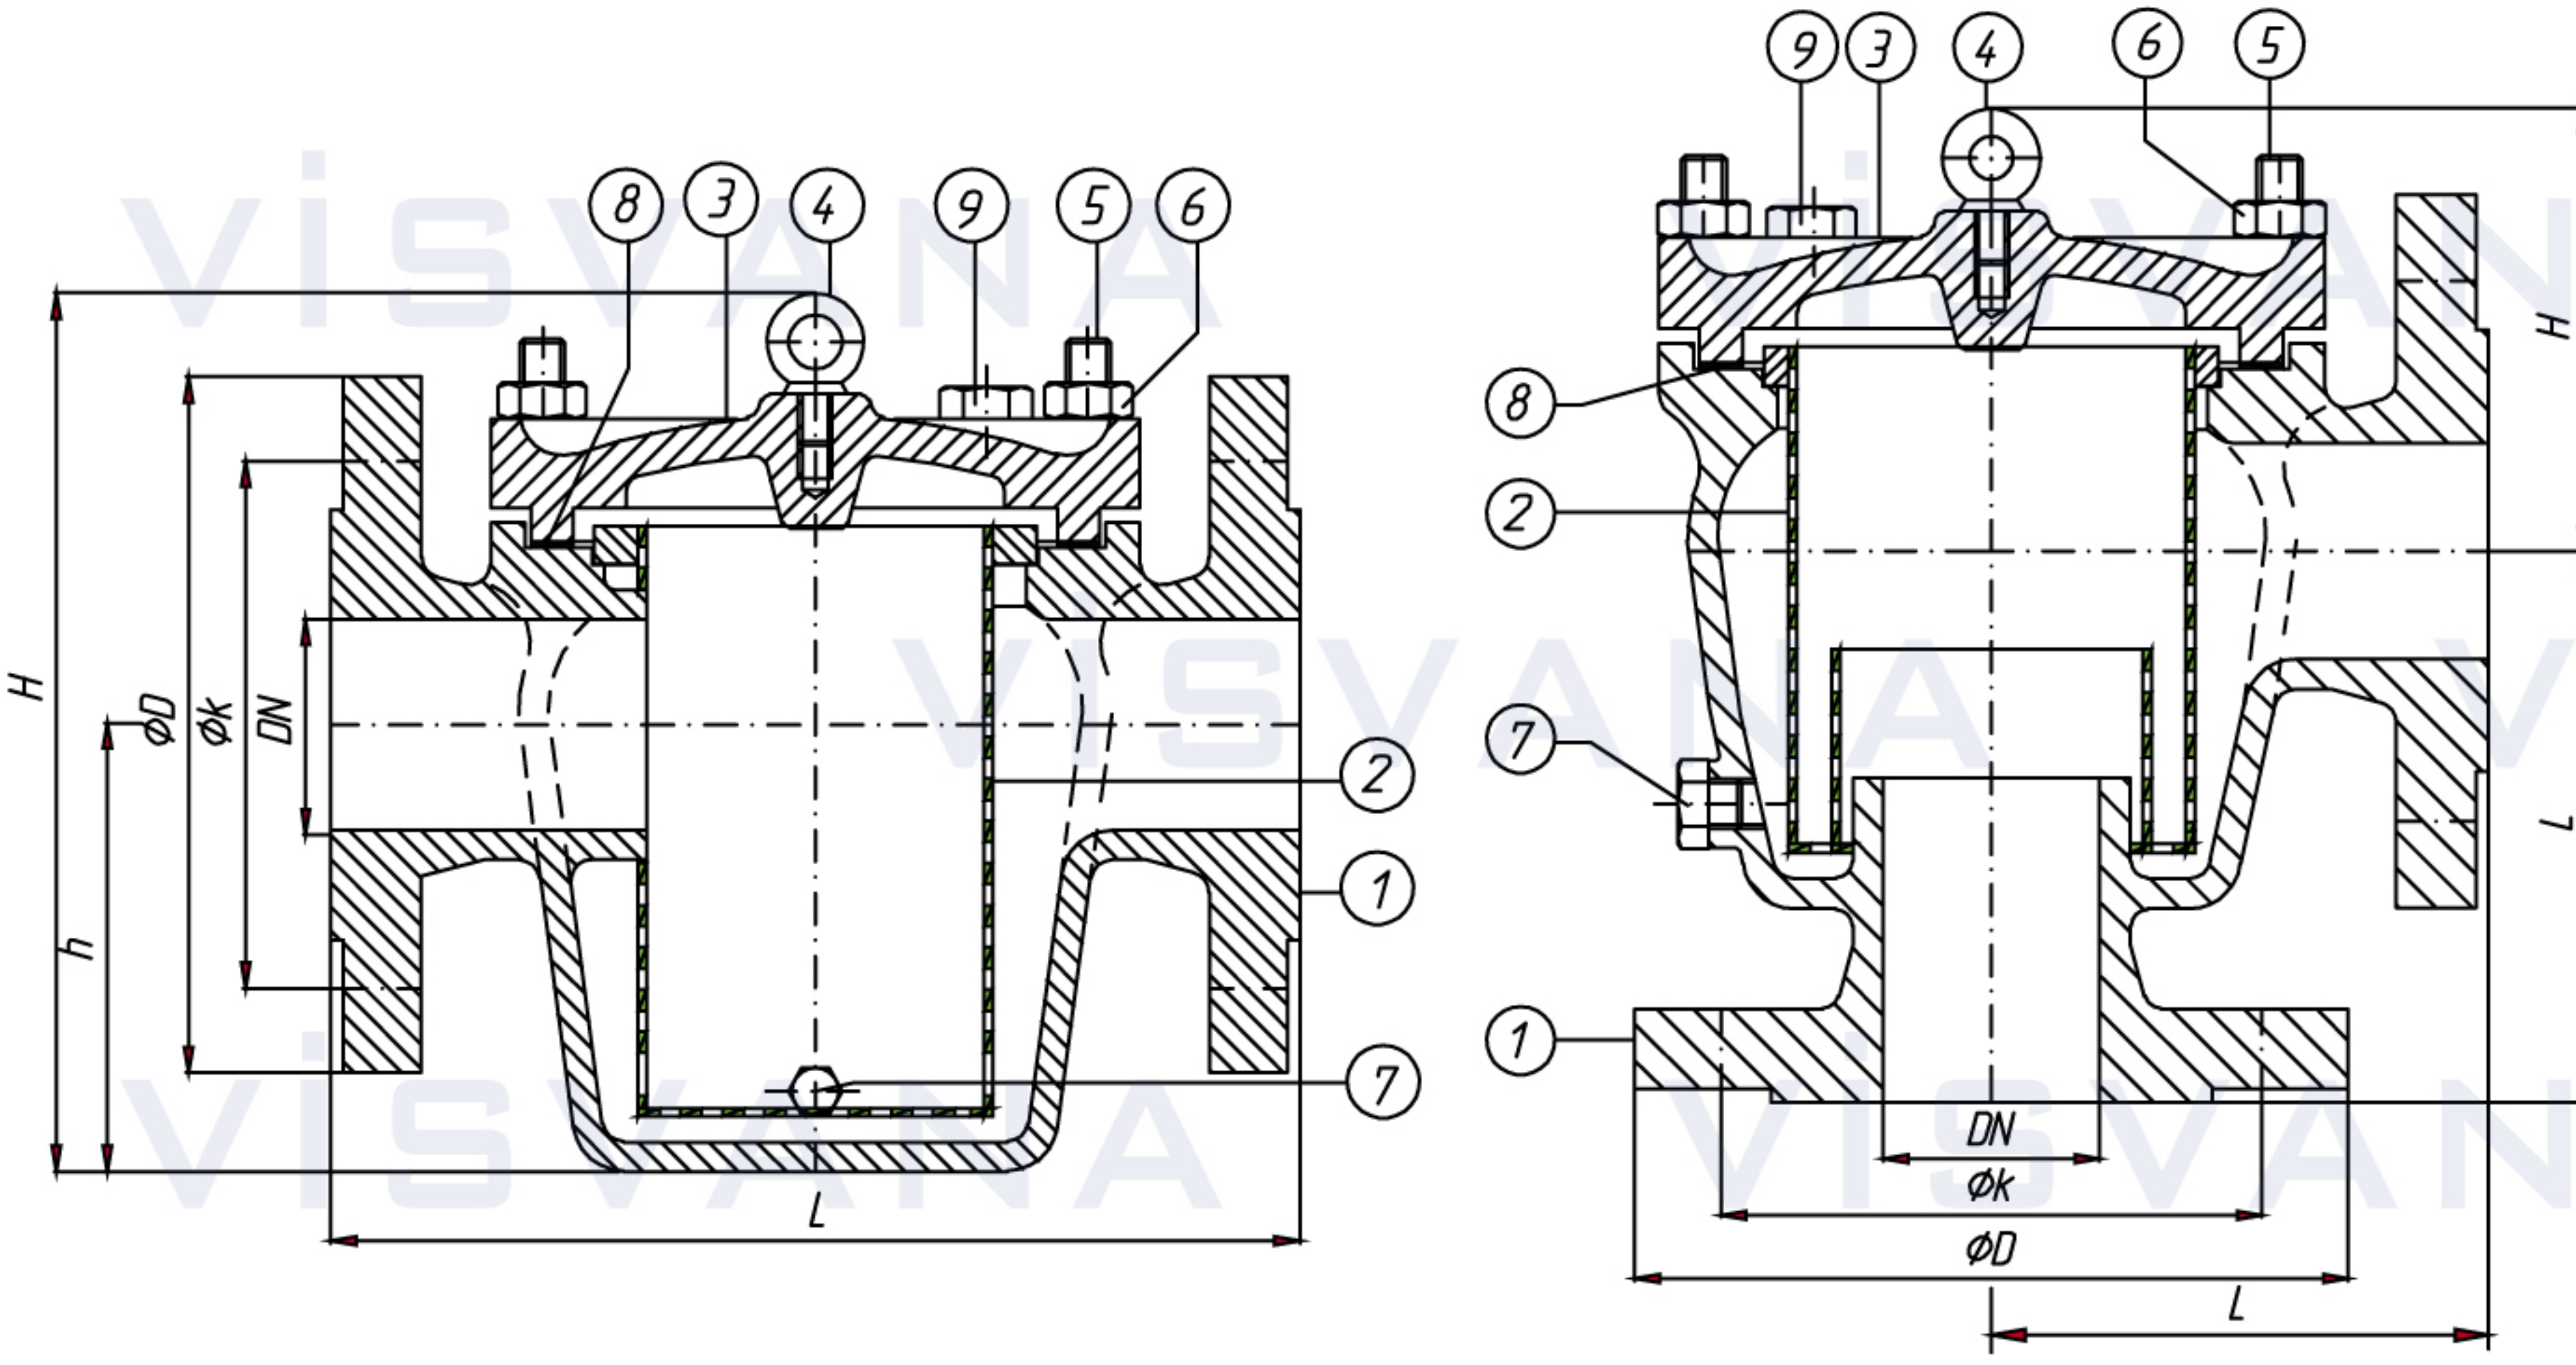

4

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG25/GGG40/GGG40.3/GSC25/Bronze RG5, RG7, RG10, CuSn10/SS304,SS316, Duplex 1.4470
2	Screen	Filtre	AISI 304L / AISI 316L / AISI 316Ti / CuNi10Fe
3	Bonnet	Kapak	GG25/GGG40/GGG40.3/GSC25/Bronze RG5, RG7, RG10, CuSn10/SS304,SS316, Duplex 1.4470
4	Ring Screw	Mapa	Galvanized Steel
5	Ring Stud	Saplama	Steel / A2 / A4
6	Nut	Somun	Steel / A2 / A4
7	Plug	Tapa	Bronze / AISI 304 / AISI 316
8	O-Ring/Gasket	O-Ring/Conta	EPDM / NBR

Nom. Diameter Anma Çapı			Capacity Water (v=1,5m/sec.)		Nom. Diameter Anma Çapı			STRAIGHT FORM / DÜZ TİP				Diameter Ağırlık		Nom. Diameter Anma Çapı			ANGLE FORM / AÇILI TİP				Diameter Ağırlık	
DN	1/min.	m³/h	DN	ØD	Øk	L	H	h	kg	DN	ØD	Øk	L	H	kg	DN	ØD	Øk	L	H	kg	
40	113	6,8	40	150	110	200	205	95	14	40	150	110	125	240	15	50	165	125	135	260	21	
50	177	10,6	50	165	125	230	225	106	19	50	165	125	135	260	21	65	185	125	150	280	25	
65	298	17,9	65	185	125	290	260	134	26	65	185	125	150	280	25	80	200	160	175	330	36	
80	495	29,7	80	200	160	310	310	156	33	80	200	160	175	330	36	100	220	180	195	350	51	
100	708	42,4	100	220	180	350	345	185	45	100	220	180	195	350	51	125	250	210	220	415	69	
125	1100	66,2	125	250	210	400	395	225	60	125	250	210	220	415	69	150	285	240	270	470	94	
150	1590	95,4	150	285	240	480	465	265	86	150	285	240	270	470	94	175	315	270	300	505	120	
175	2360	142	175	315	270	550	500	296	115	175	315	270	300	505	120	200	340	295	300	540	138	
200	2830	169,6	200	340	295	600	565	335	147	200	340	295	300	540	138	250	395	350	390	660	200	
250	4420	235,2	250	395	350	600	610	345	180	250	395	350	390	660	200	300	445	400	450	760	278	
300	6365	382	300	445	400	700	675	390	245	300	445	400	450	760	278	350	505	460	400	730	330	
350	8660	520	350	505	460	800	790	425	325	350	505	460	400	730	330	400	565	515	420 ₅₂₀	980	458	
400	12350	740	400	565	515	740	900	470	415	400	565	515	740	900	458							