


FIRE VALVE STRAIGHT TYPE (BRONZE)

DÜZ TİP YANGIN VANASI (BRONZ)

Pressure / Anma Basıncı: PN 16 / 150 lb
 Size Range / Ölçü Aralığı: DN40-DN50-DN65
 Dimensions / Ölçüler: DIN 86211
 Flange Ends / Flanş: DIN 2501 / ASME B16.10
 Options/ Opsiyon: ANSI, JIS Flange

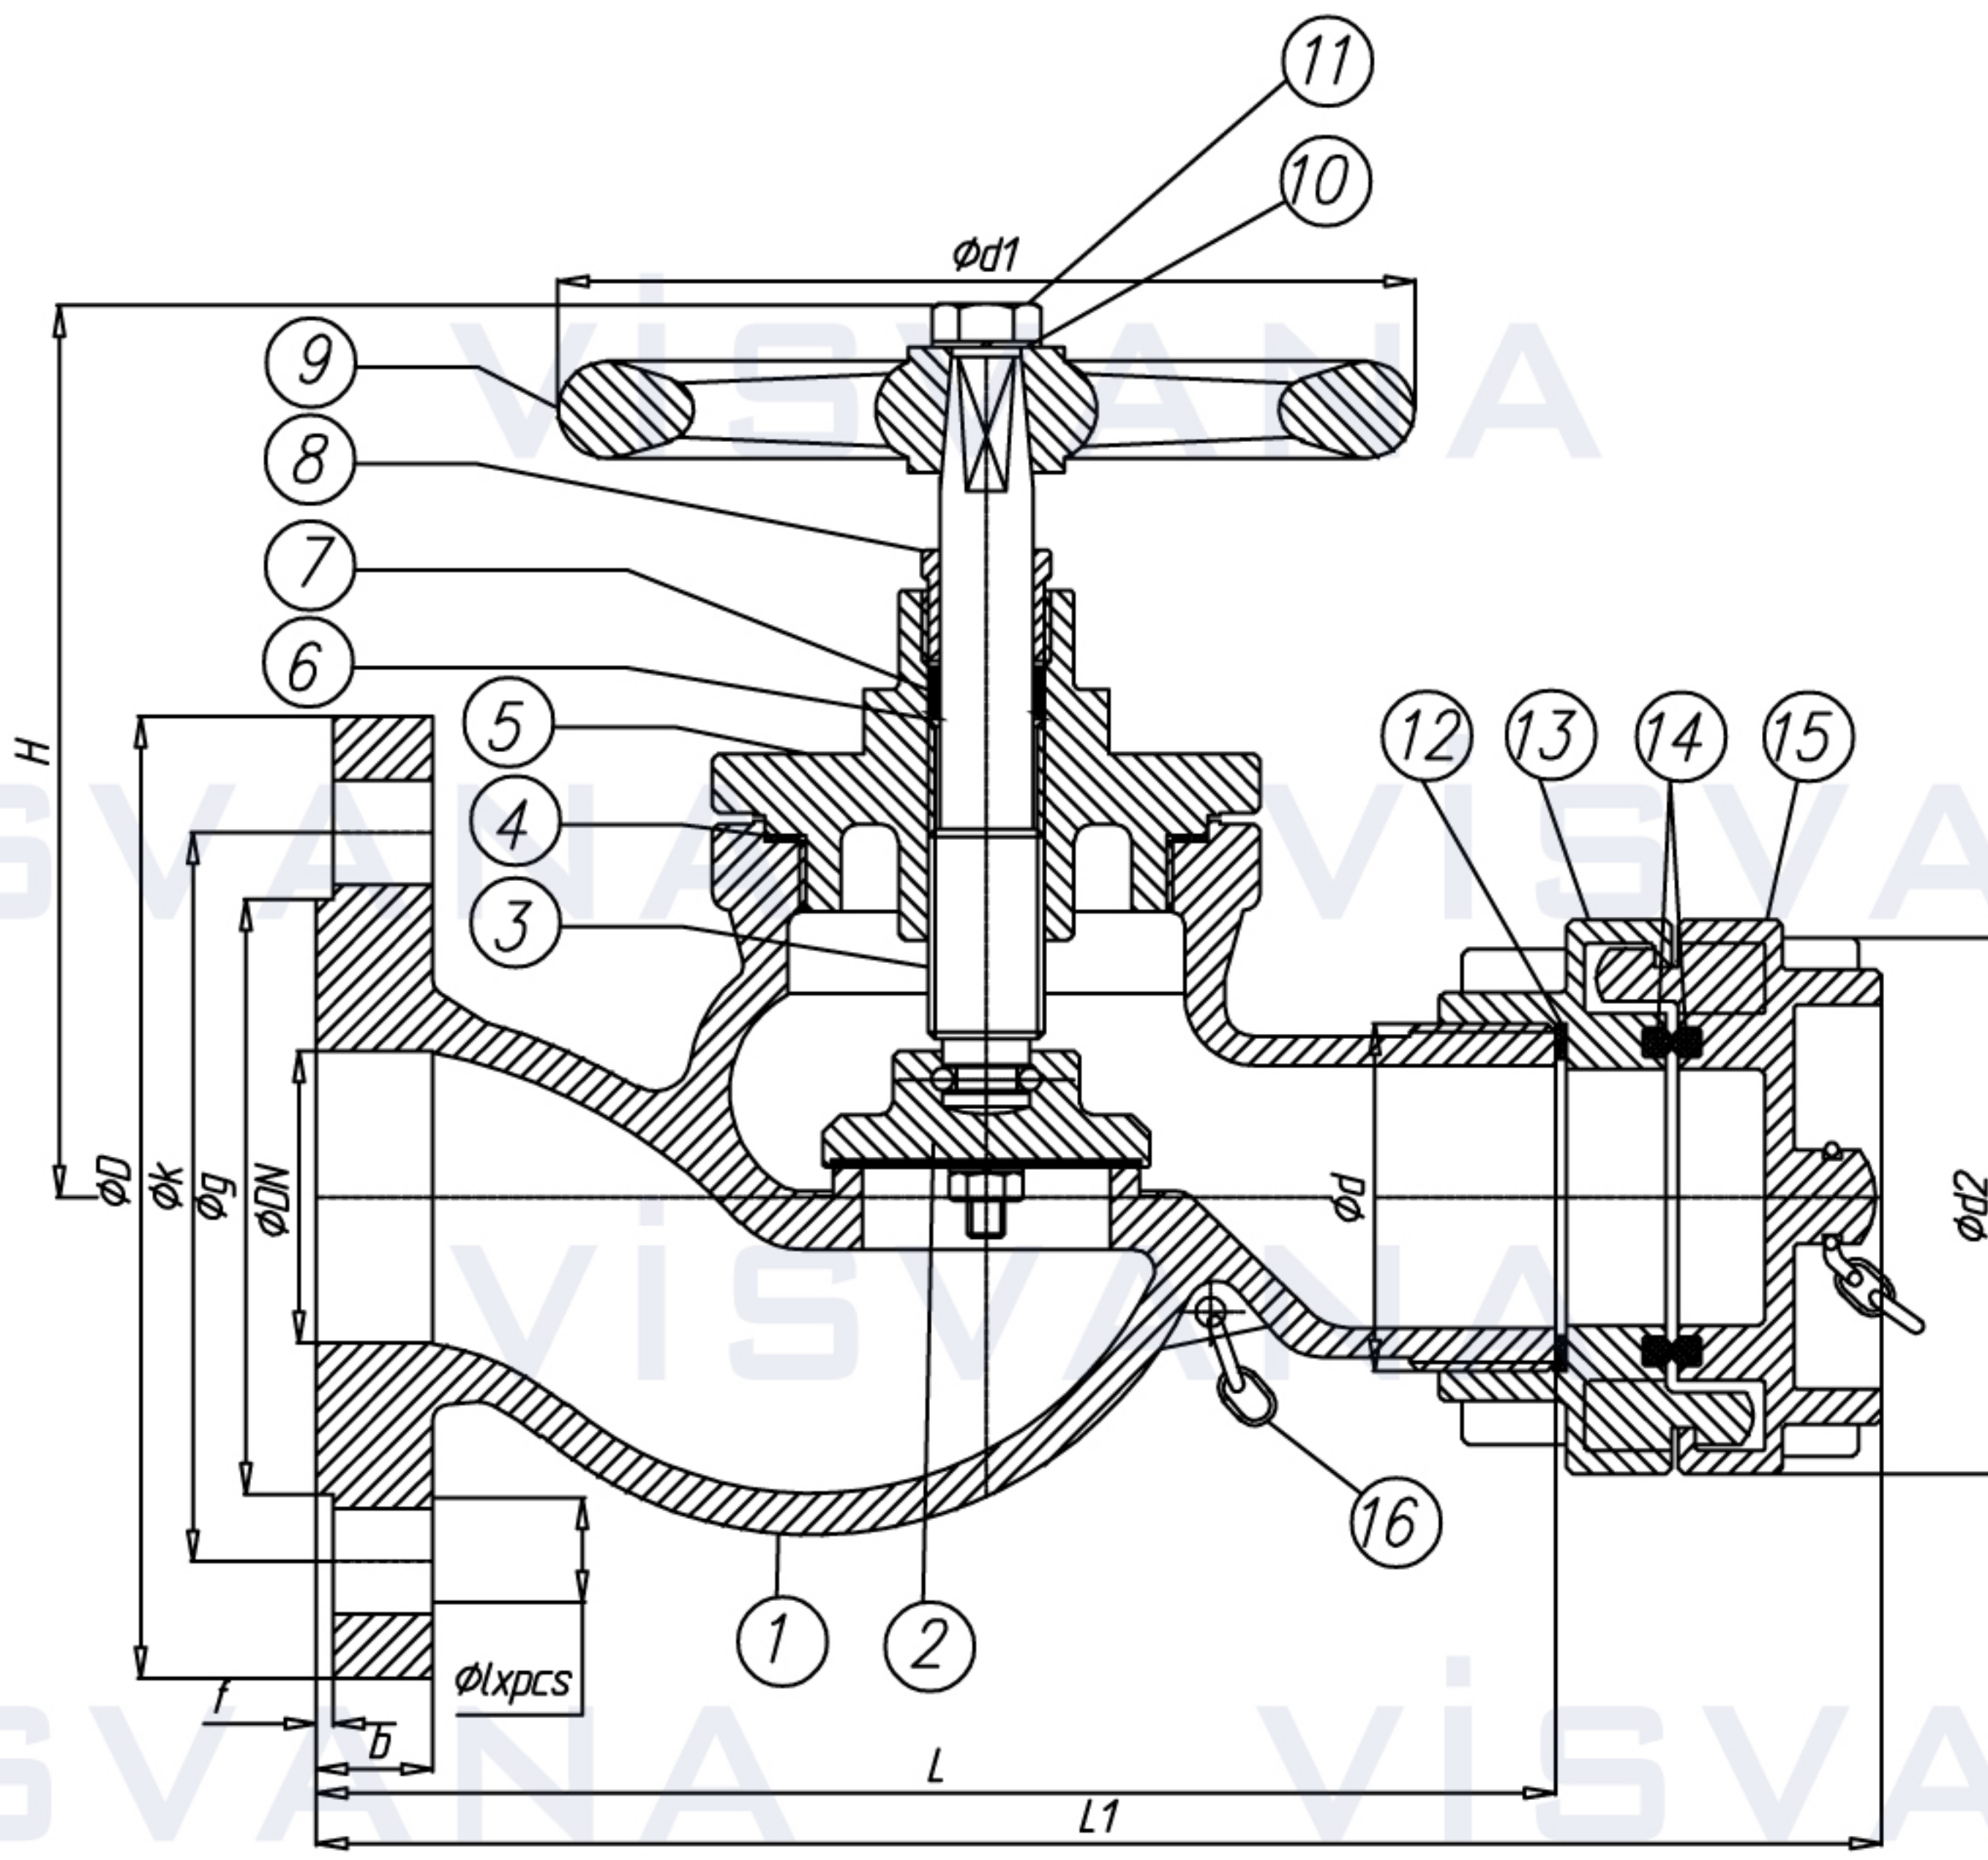

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	G-CuSn5Zn5Pb5-C	9	Handwheel	Volan	GG-25
2	Disc	Klape	G-CuSn5Zn5Pb5-C	10	Washer	Rondela	Steel 5 Zn
3	Stem	Mil	CuZn39Pb3	11	Bolt	Civata	Steel 5 Zn
4	Gasket	Conta	Perbunan	12	Gasket	Conta	Perbunan
5	Bonnet	Kapak	G-CuSn5Zn5Pb5-C	13	Fixed Coupling	Sabit Kaplin	G-CuSn5Zn5Pb5-C
6	Wasaher	Rodela	CuZn39Pb3	14	O-Ring	O-Ring	Perbunan
7	Packing	Salmastra	Graphite / PTFE	15	Blind Coupling	Tapa Kaplin	G-CuSn5Zn5Pb5-C
8	Gland	Baskı	Steel 5 Zn	16	Chain	Zincir	Steel 5 Zn

Nominal Diameter Anma Çapı	PN 16 / DIN EN 1092						Valve Dimensions Vana Boyutları	DIN 86211					Weight Ağırlık
	ØD	Øk	Øg	Øxad	Øb	f	Ød	Ød2	L	L1	Ød1	H	kg
DN 40	127	98,6	73	Ø16x4	14	3	R11/2"	96	150	130	140	200	7
DN 50	152	120,7	92	Ø19x4	16		R2"	96	165	130		240	8,5
DN 65	178	139,7	105				R21/2"	124	200	185	160	265	14