


**QUICK CLOSING VALVE**  
**ANGLE FORM VAKK-16**  
**ANİ KAPAMA VANASI**  
**AÇILI TİP VAKK-16**

**VAKK-16**   
**vis**

Pressure Rate / Basınç Aralığı: PN 16  
 Size Range / Ölçü Aralığı: DN15-DN200  
 Dimensions / Ölçüler: DIN 3202/2-F32(Angle-Açılı)  
 Flange Ends / Flanş: DN 2533  
 Options / Opsiyon:ANSI, JIS Flanges

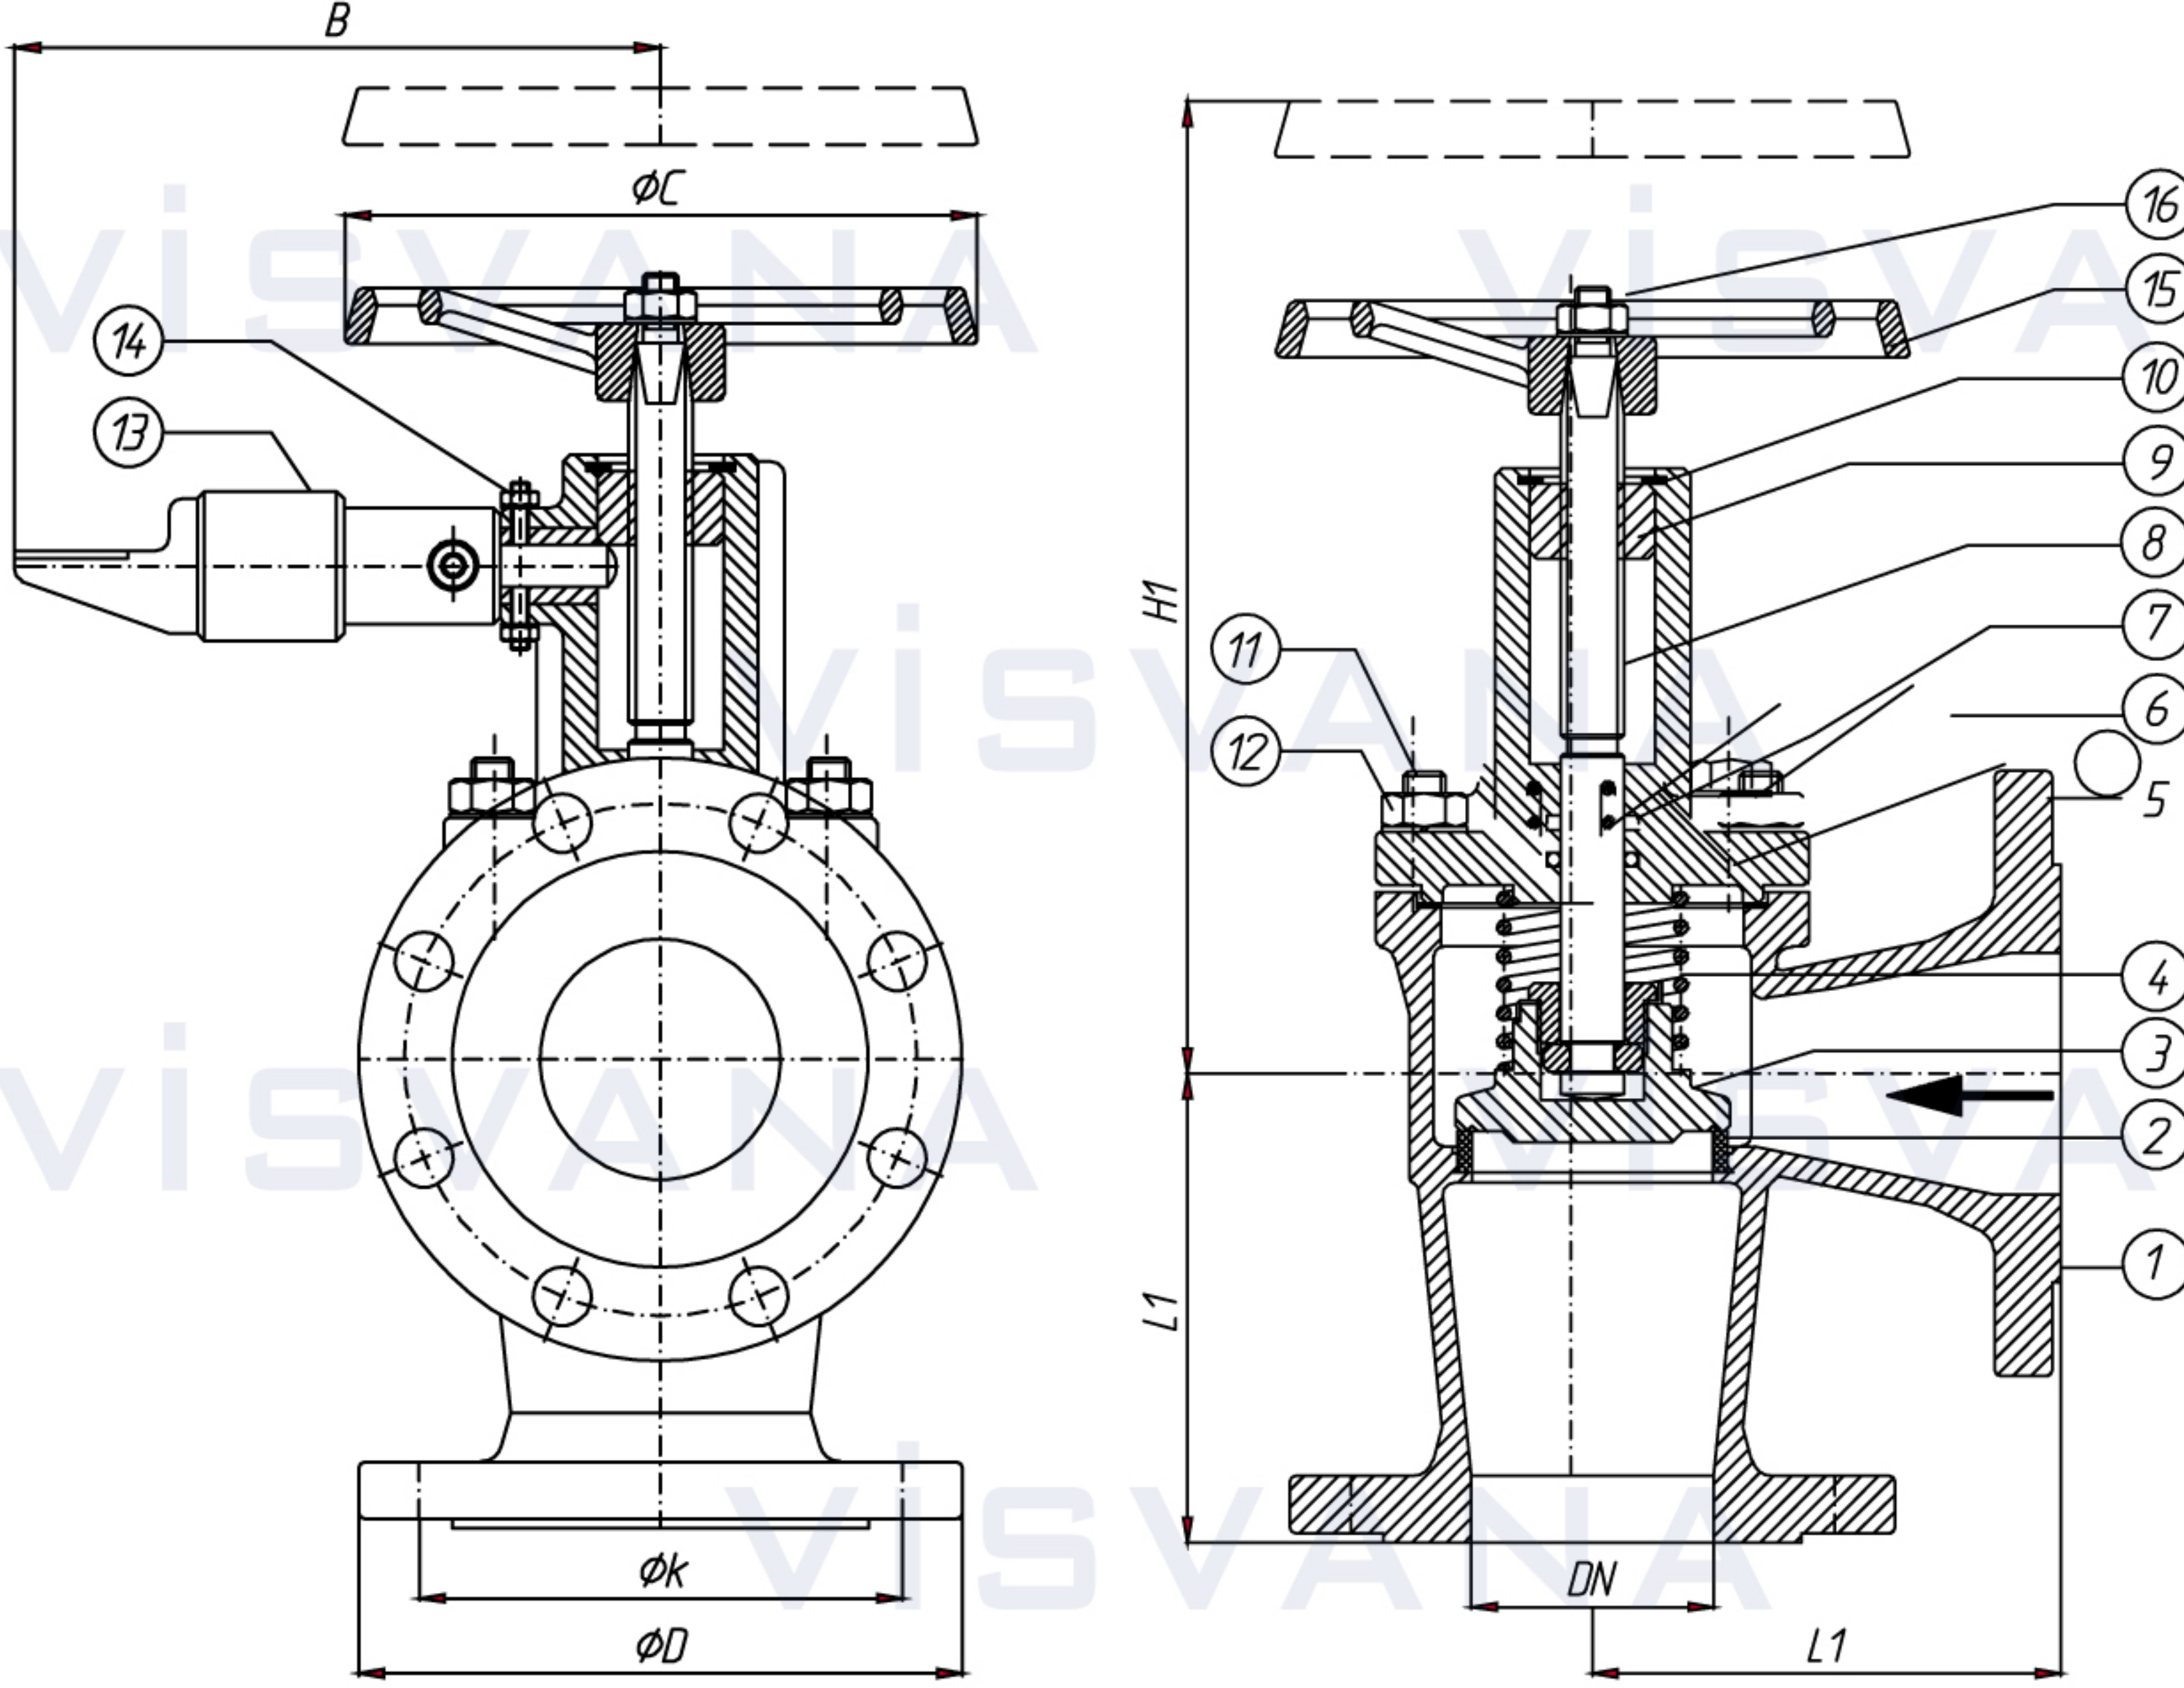

5

| NO | P. NAME   | P. ADI     | MATERIAL / MALZEME                                                           | NO | P. NAME   | P. ADI     | MATERIAL / MALZEME                           |
|----|-----------|------------|------------------------------------------------------------------------------|----|-----------|------------|----------------------------------------------|
| 1  | Body      | Gövde      | GGG40/GGG40.3/GSC25/Bronze RG5, RG7, RG10, CuSn10/SS304,SS316, Duplex 1.4470 | 8  | Spindle   | Mil        | AISI 420/AISI 304/AISI 316/Bronze RG5/Duplex |
| 2  | Seat Ring | Gövde Siti | AISI 304 / AISI 316 / Bronze RG5 / Duplex                                    | 9  | Stem Nut  | Mil Somunu | AISI 420/AISI 304/AISI 316/Bronze RG5/Duplex |
| 3  | Disc      | Disk       | AISI 420/AISI 304/AISI 316/Bronze RG5/Duplex                                 | 10 | Segment   | Segman     | Steel                                        |
| 4  | Spring    | Yay        | AISI 302                                                                     | 11 | Stud      | Saplama    | Steel / A2 / A4                              |
| 5  | Gasket    | Conta      | Klingerite / Graphite                                                        | 12 | Nut       | Somun      | Steel / A2 / A4                              |
| 6  | Bonnet    | Kapak      | GGG40/GGG40.3/GSC25/Bronze RG5, RG7, RG10, CuSn10/SS304,SS316, Duplex 1.4470 | 13 | Piston    | Piston     | Brass                                        |
| 7  | O-Ring    | O-Ring     | Viton                                                                        | 14 | Stud Nut  | Saplama    | Steel / A2 / A4                              |
|    |           |            |                                                                              | 15 | Handwheel | Volan      | GG25                                         |
|    |           |            |                                                                              | 16 | Nut       | Somun      | Steel / A2 / A4                              |

| Nominal Pressure / Basıncı                                                 | PN          | 16  |     |     |     |      |     |     |     |     |     |     | 10  |
|----------------------------------------------------------------------------|-------------|-----|-----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|
| Nominal Diameter / Anma Çapı                                               | DN          | 15  | 20  | 25  | 32  | 40   | 50  | 65  | 80  | 100 | 125 | 150 | 200 |
| Valve Dimensions / Vana Boyutları<br>TSEK DIN 3202/2-F32<br>DIN EN 558-1-8 | L           | 90  | 95  | 100 | 105 | 115  | 125 | 145 | 155 | 175 | 200 | 225 | 275 |
|                                                                            | B           | 145 |     |     |     |      |     |     |     |     |     | 150 | 155 |
|                                                                            | ØC          | 120 |     | 140 |     | 160  |     | 180 | 200 | 225 | 250 | 300 | 400 |
|                                                                            | H Open Açık | 185 | 185 | 195 | 205 | 230  | 240 | 275 | 290 | 350 | 410 | 430 | 580 |
| Flange Dimensions / Flanş Ölçüleri<br>DIN EN 1092 PN 16                    | D           | 95  | 105 | 115 | 140 | 150  | 165 | 185 | 200 | 220 | 250 | 285 | 340 |
|                                                                            | k           | 65  | 75  | 85  | 100 | 110  | 125 | 145 | 160 | 180 | 210 | 240 | 295 |
| Weight / Ağırlık                                                           | kg          | 4,4 | 5,5 | 6,5 | 8   | 10,5 | 13  | 17  | 24  | 30  | 45  | 65  | 110 |